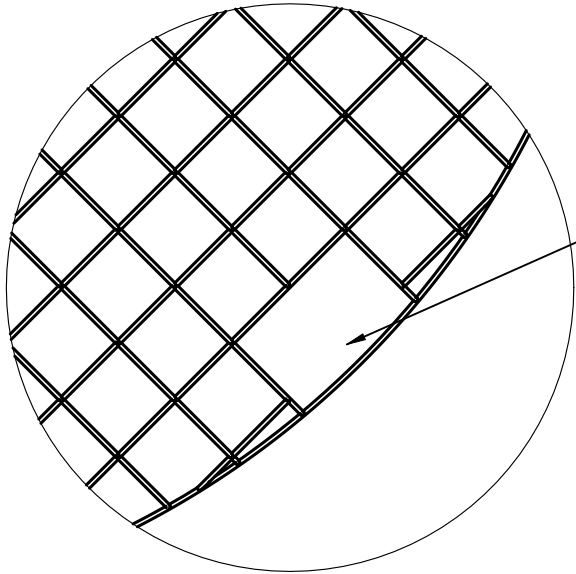
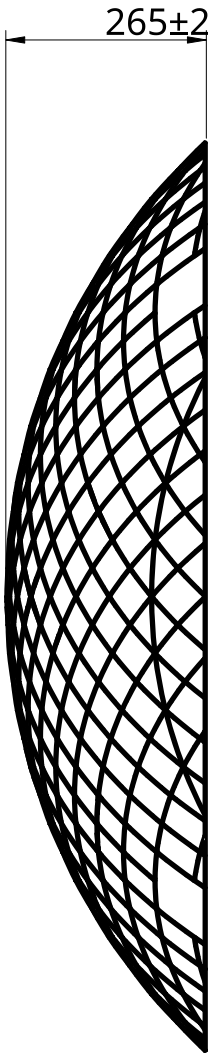
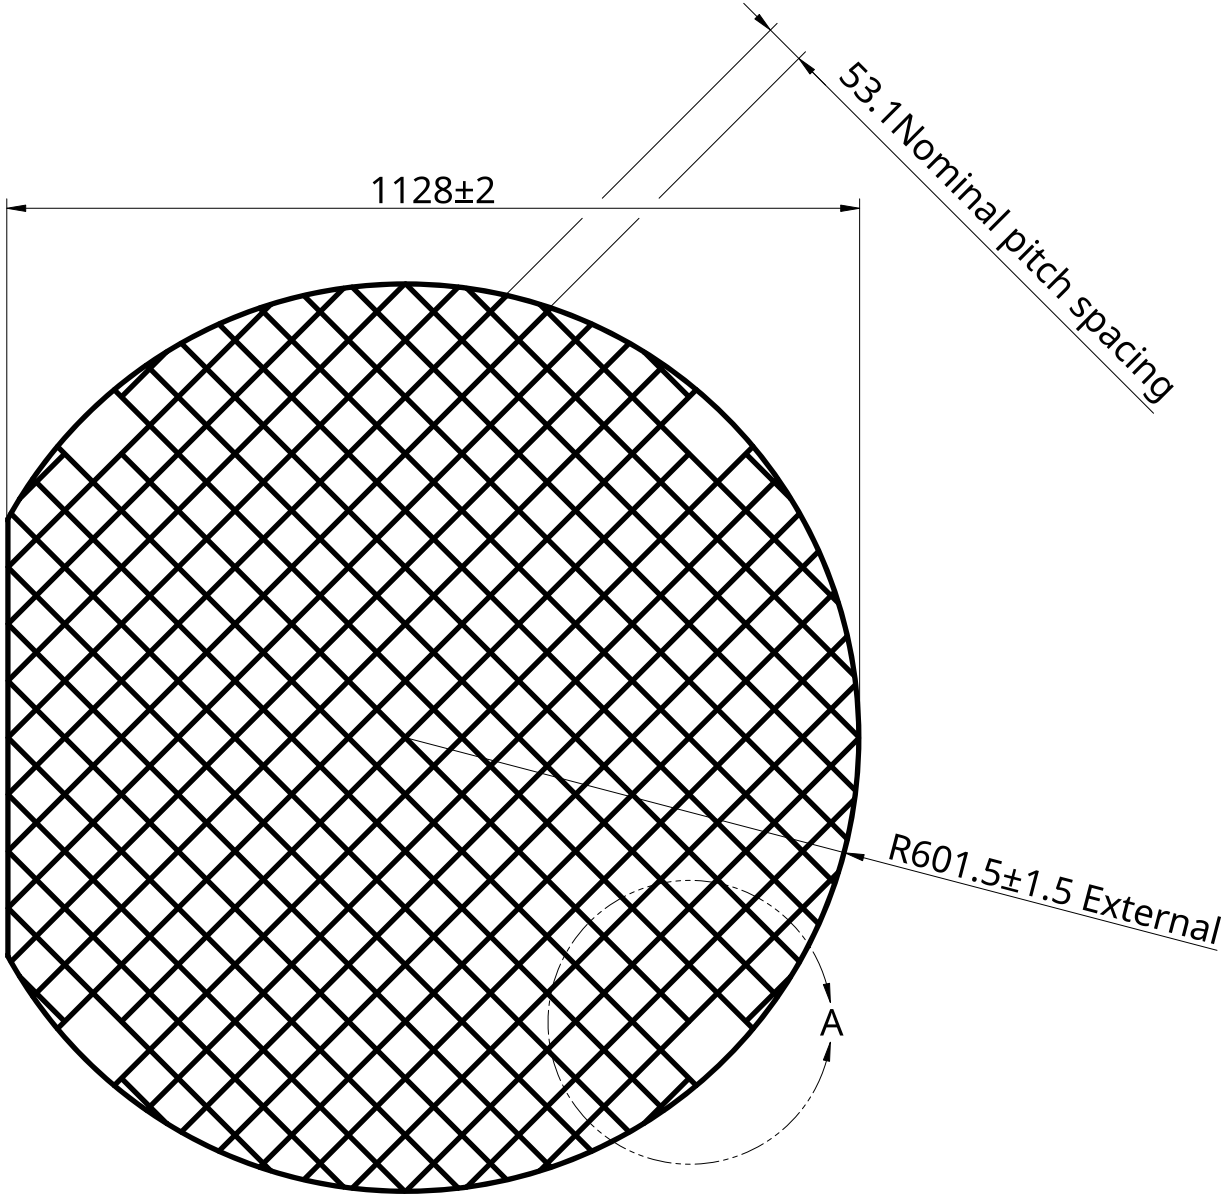





Weldmesh spacing based on 3.1mm or 10SWG as minimum wire guage. Larger wire gauge is acceptable however min 50mm pitch spacing to be created. Discuss with HoverAid if alternative size proposed

Outer ring to be 6 - 8 SWG if possible - please discuss with Andy Mayo



Cut out section of mesh for clamp fixing to duct bellmouth, 4No at 90 °

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR = ± ° SURFACE FINISH  DO NOT SCALE DRAWING BREAK ALL SHARP EDGES AND REMOVE BURRS THIRD ANGLE PROJECTION 		NAME	SIGNATURE	DATE	 Reaching the Unreachable RR4B Fan guard		
	DRAWN	ANDY MAYO		2024-01-23			
	CHECKED						
	APPROVED				SIZE A3		
					DWG NO. RR4B -12-099		
	MATERIAL Stainless steel weld mesh	FINISH Raw metal		SCALE 1:10	WEIGHT	SHEET 1 of 1	